

GLASS

INDUSTRY



Find The Great
Tools and Equipment here:

- ▶ LIFTING EQUIPMENT
- ▶ JIB CRANES
- ▶ FORKLIFT EQUIPMENT
- ▶ SLAB & BUNDLE RACKS
- ▶ A-FRAMES
- ▶ TROLLEYS
- ▶ WORKBENCHES & STANDS
- ▶ WORKSHOP EQUIPMENT

TABLE OF CONTENTS

VACUUM GLASS LIFTERS

Vacuum Glass Lifter - AVGLP8-800
Auto Rotate Vacuum Glass Lifter - AVGLP2-AR
Vacuum Glass Lifter - AVGLP4-MR-250
Vacuum Glass Lifter - AVGLP4-400L
Vacuum Glass Lifter - AVGLP4-400
Vacuum Glass Lifter - AVGLP6-500
Fork Mounted Vacuum Lifting Attachment

ELECTRIC VACUUM GLASS LIFTERS

Electric Powered Vacuum Glass Lifter - AEPVGL-MR
Electric Vacuum Glass Lifter - AEVGLP8-800
Electric Vacuum Glass Lifter - AEVGLP4-500

DC POWERED VACUUM GLASS LIFTERS

DC Powered Vacuum Glass Lifter - ARGL-500
DC Powered Vacuum Glass Lifter (Dual System) - ARGL-500DS

VACUUM LIFTERS / DRILLING MACHINE

180° Rotation Vacuum Lifter - ARV-180
A180° Electric Rotation Vacuum Lifter - AERV-180
Aardwolf Glass Lifter AL30AWJH
Vacuum Lifter - AVLB4
Hand Pump Vacuum Lifters - AVLHP240/480
Vacuum Lifter Parking Stations
Aardwolf Glass Lifters
Portable Air Drilling Machine

"A" FRAMES

Drywall Trolley
Single Side Transport Rack
Transport Frames - TF-SERIES
Transport Frames - AF-SERIES
Slab Buggy Transport Frames
Storage 'A' - FRAMES
Folding 'A' Frames
Wolf Racks
Demountable Frames
Aardwolf Harp Rack



TABLE OF CONTENTS

SLAB & BUNDLE RACKS

Slab & Bundle Racks

TROLLEYS

Trolleys / Self-locking Series

SPREADER BEAMS

Spreader Beams

CARGO LASHINGS & SLINGS

Endless Webbing Slings
Ratchet Tie Downs

JIB CRANES

Jib Cranes
Manual Counterbalance Crane AMCC
Powered Counterbalance Crane APCC
Powered Counterbalance Crane with Lateral Movement APCCL

HAND VACUUM CUPS

Hand Vacuum - Cup Lifter
Oval Hand Vacuum - Cup Lifter OHVC
Hand Vacuum - Cup Lifter HVC
Double Suction Cup HVC05
Triple Suction Cup HVC06

STONE CARRYING HAND CLAMPS

Stone Panel Carriers SCC02
Carry Clamp for Sheet Material SCC03
Carry Clamp for Sheet Material SCC05

FORK HOOK ATTACHMENT

Fork Hook Attachment
Bow Shackle & Swivel

WASTE BINS

Aardwolf Drop Bottom Bin ADBB-2000
Waste Bin WB620PC (Powder coated) 3mm
Waste Bin WB1000PC (Powder coated) 3mm
Waste Bin WB1000G (Galvanised) 3mm





VACUUM GLASS LIFTERS

Operated by compressed air and with a sturdy structure, the Vacuum Glass Lifters are able to lift, tilt and rotate glass sheets manually in vertical directions at all angles.

AVGLP8-800

- Pad diameter: 300 mm | 12 in
- Working load limit: 400-800 kg | 882-1764 lb
- Net weight: 108 kg | 238 lb



Auto Rotate Vacuum Glass Lifter AVGLP2-AR

- Pad diameter: 300 mm | 12 in
- Working load limit: 200 kg | 441 lb
- Net weight: 60 kg | 132 lb



Vacuum Glass Lifter AVGLP4-MR-250

- Pad diameter: 280 mm | 11 in
- Working load limit: 250 kg | 551 lb
- Net weight: 81 kg | 179 lb



AVGLP4-400L

- Pad diameter: 300 mm | 12 in
- Working load limit: 200-400 kg | 441-882 lb

Pneumatic vertical-horizontal tilting from 0 to 90°. Automatic vacuum pumping if vacuum loss occurs. Acoustic and visual alarm system. Attach/release material with an ON/OFF slide valve.



Vacuum Glass Lifter AVGLP4-400

- Pad diameter: 280 mm | 11 in
- Working load limit: 200 - 400 kg | 441 - 882 lb
- Net weight: 79 kg | 174 lb



Number
of pad: 6

Vacuum Glass Lifter AVGLP6-500

- Pad diameter: 300 mm | 12 in
- Working load limit: 500 kg | 1102 lb
- Net weight: 173 kg | 381 lb

FORK MOUNTED VACUUM LIFTING ATTACHMENT

The Fork Mounted Vacuum Lifting Attachment is designed to lift and lower sheet materials. The device combines with a vacuum lifter with a fork truck and remote control for handling diversified types of sheet, plate and large panels such as glass, stone, metal, concrete, plastics, timber and laminates.



FMVLA

- Pad sizes: 520 x 320 mm | 20.5 x 12.6 in
- Working load limit: 760 - 1000 kg | 1676 - 2204 lb
- Net weight: 275 kg | 606 lb

- Ability to turn 90 degrees through an electrically operated remote control.
- Vacuum pads can be easily adjusted.
- The pressure control system automatically activates the vacuum pump once the pressure is lower than the allowed limit.
- Operated by an Australian Standard AS4991-2004 battery.
- Audio/visual safety system.
- Integrated with a forklift through a safe chain system.

- Provides versatile lifting that is cost-effective.
- More versatile than magnets and more productive than clamps or slings.



- Pad diameter: 300 mm | 12 in
- Working load limit: 400-500 kg | 882-1102 lb
- Net weight: 145 kg | 320 lb

AEVGLP4-500

ELECTRIC VACUUM GLASS LIFTER

Sturdy and durable structure, these lifters are the ideal equipment when working at large construction sites. Additionally, the flexible crossbar and stringer beams can be adjusted easily, giving greater flexibility on-site. With outstanding features supporting glass materials handling. The Lifters are the solution for safety & efficiency seekers.



Electric Powered Vacuum Glass Lifter AEPVGL-MR

With outstanding features supporting glass materials handling, the AEPVGL-MR is the solution for users seeking safety and efficiency.

- Pad diameter: 280 mm | 11 in
- Working load limit: 500 kg | 1102 lb
- Net weight: 204 kg | 450 lb



Electric Vacuum Glass Lifter AEVGLP8-800

Handling of long glass sheets.
Audio and visual alarm system.
Vertical-horizontal tilting from 0 to 90°.
Adjustable vacuum pads based on glass sizes.

- Pad diameter: 300 mm | 12 in
- Working load limit: 400 - 800 kg | 882 - 1763 lb
- Net weight: 203 kg | 448 lb

DC POWERED VACUUM GLASS LIFTER

ARGL-500

It is suitable for lifting and transporting glass elements of up to 500kg. This device can be used to install windows and large glass sheets with the aid of a forklift, counter balance crane or overhead hoist. On-board DC power systems provide cord-free operation at the job site. Movable vacuum pads and extension arms allow the DC Powered Vacuum Glass Lifter - ARGL-500 to handle glass in nearly every size and shape.

| | | |
|--------------------|--------------|---------------|
| Pad diameter | 300 mm | 12 in |
| Working load limit | 400 - 500 kg | 882 - 1102 lb |



DC POWERED VACUUM GLASS LIFTER

(DUAL SYSTEM)

ARGL-500DS

- Spring-loaded suction pads.
- 360° rotation with 45° steps.
- Four extension arms with the ability to extend and retract.
- Two independent vacuum circuits provide mutual aid in the event of a system error.
- The automatic vacuum pumping system.
- Audio and visual warning system.
- 12V power supply

| | | |
|--------------------|--------------|---------------|
| Pad diameter | 300 mm | 12 in |
| Working load limit | 400 - 500 kg | 882 - 1102 lb |

180° ROTATION VACUUM LIFTER

ARV-180



| | | |
|--------------------|--------|--------|
| Pad diameter | 200 mm | 8 in |
| Working load limit | 160 kg | 353 lb |

180° ELECTRIC ROTATION VACUUM LIFTER

AERV-180

- 220V single-phase electric motor.
- Gas spring-controlled hook attachment.
- Self-adjustment and balance.
- Attach/release materials with an ON/OFF slide valve.
- The pressure control system automatically activates the vacuum pump once the pressure is lower than the allowed limit.
- Audio/visual safety system.



| | | |
|--------------------|--------|--------|
| Pad diameter | 200 mm | 8 in |
| Working load limit | 160 kg | 353 lb |

AARDWOLF GLASS LIFTER AL30AWJH

The Aardwolf Glass Lifter AL30AWJH is a unique lifting device for glass. This clamp enables cranes and forklift booms to lift glass sheets vertically from a racking system.

The advantage is that it only requires a small gap between two glass sheets to set down at the top of one sheet and grip it.

Furthermore, its robust structure makes the clamp capable of handling glass sheets weighing up to 1200kg.

| | | | |
|---------------------|-----------|--|------------|
| Grip range: | 0 - 30 mm | | 0 - 1.2 in |
| Working load limit: | 1200 kg | | 2646 lb |
| Net weight: | 21.4 kg | | 47 lb |



EASY OPERATION



VACUUM LIFTER

AVLB4

It is designed for the horizontal lifting of glass, laser cutters, metal sheets, and panels. In addition, the compact design makes it easy to hook onto a hoist.

- Vacuum tank.
- Aluminum construction, lightweight.
- Audio/visual alarm system.
- Attach/release material by pressing a Vacuum or two Release buttons.
- Easy to operate. Battery charger.



Power supply: 12V
Battery capacity: 6.0Ah
Charging cycle: 1000 times
Non-stop working time: 2.5 hours

| | | |
|--------------------|--------|--------|
| Pad diameter | 150 mm | 6 in |
| Working load limit | 160 kg | 353 lb |

HAND PUMP VACUUM LIFTERS

AVLHP240/480

*



**



This is powered by a hand pump or venturi pump designed to be used in the factory or on the building site.

It is especially suitable for the horizontal transportation of non-porous sheet materials such as steel plate, glass, aluminum plate, and polished marble or granite

| | | |
|--------------------|--------------|---------------|
| Pad size * | 300 mm | 12 in |
| Working load limit | 120 - 240 kg | 265 - 529 lb |
| Pad size ** | 520x320 mm | 20.5x12.6 in |
| Working load limit | 240 - 480 kg | 529 - 1058 lb |

VACUUM LIFTER PARKING STATIONS




It can be used in combination with the vacuum lifter model AVLP1 / AVLP4. Parking station mounted on wheels. This is ideal for moving the vacuum lifter to a safe storage area when not in use.

It allows the vacuum lifter to be parked without the vacuum pads coming into contact with the floor, workbench or other surfaces that could damage the vacuum pads.




AARDWOLF GLASS LIFTERS

W.L.L: **750 KG | 1654 LB**



The Glass Lifters are the perfect piece of equipment for lifting and moving materials in the glass industry. This equipments are integrated with automatic self-adjustment without an external electric or pneumatic engine. These durable and dependable lifters are ideal for any racking system.

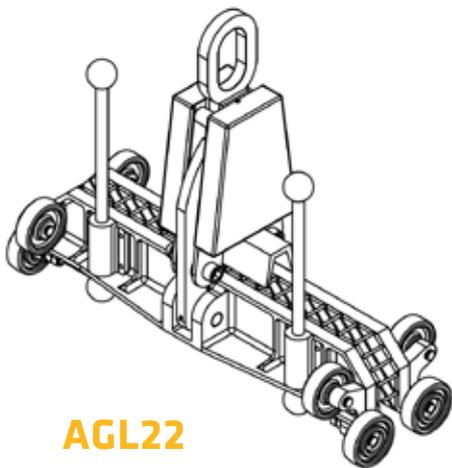

AGL22

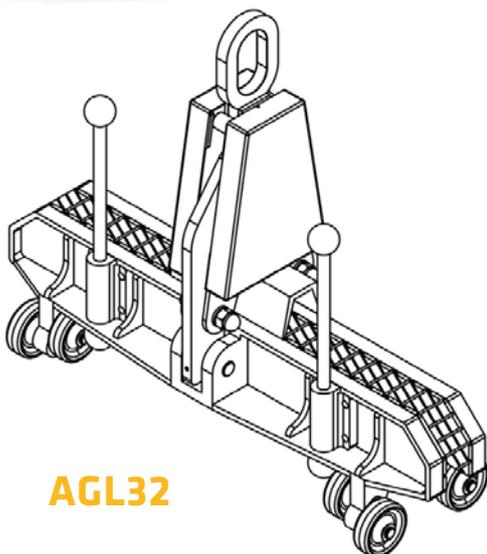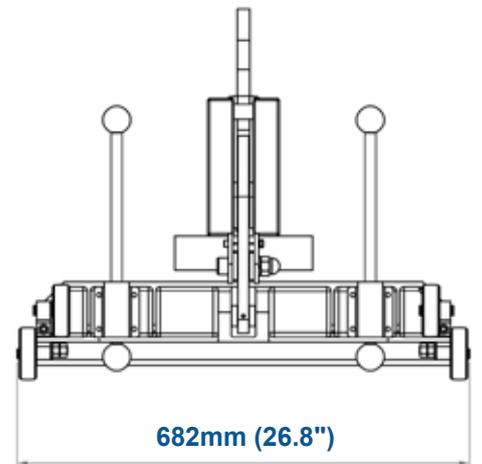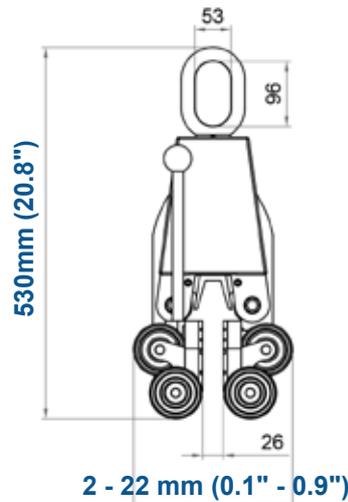

AGL32

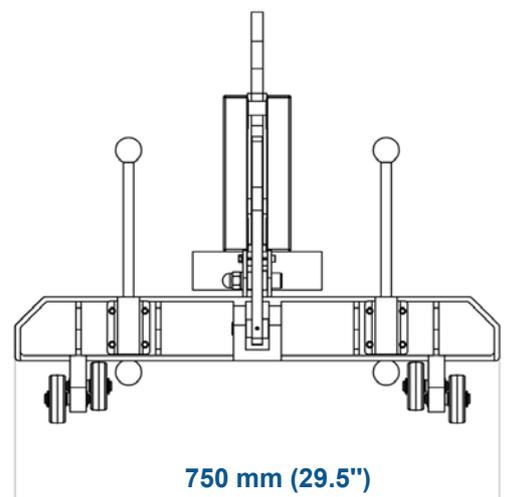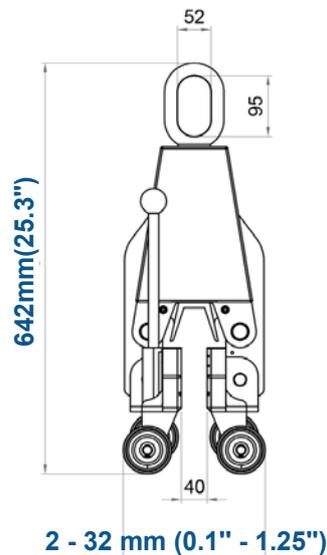



PORTABLE AIR DRILL MACHINE

The Aardwolf Portable Air Drilling Machine is a lightweight, versatile drill made of aluminum to reduce weight, and features an integrated vacuum base making it instantaneous to set up with no need for anchoring or clamping.

The Aardwolf Air Drilling Machine quickly attaches to both smooth and rough flat surfaces once the vacuum is applied. This drilling machine is suitable for use on vertical and horizontal surfaces whether the surface is cement, stone, glass or metal. The vacuum base provides stability.

- The machine has stepless speed regulation and the max. free speed is 1,200 rpm.
- Conveniently placed water nozzle ensures that the drill bit is kept cool during drilling.
- Three-speed control switch.
- The Drilling Depth Control design can show or setup the depth that you are drilling
- The Aardwolf Portable Drilling Machine has an integrated vacuum base which can be mounted on cement, stone, glass or metal.

| | | |
|-----------------------|-----------|--------|
| Max. free speed | 1.200 rpm | |
| Max. drill bit length | 125 mm | 4.9 in |
| Drilling bore size | 50 mm | 2 in |





DRYWALL TROLLEY

SAME BUT DIFFERENT



DWT-1180P

- Width of slab storage base area: 300 mm | 11.8 in
- Working load limit: 1000 kg | 2204 lb
- Net weight: 39 kg | 86 lb




DWT-1180

- Width of slab storage base area: 307 mm | 12 in
- Working load limit: 1000 kg | 2204 lb
- Net weight: 39 kg | 86 lb



SINGLE SIDE TRANSPORT RACK

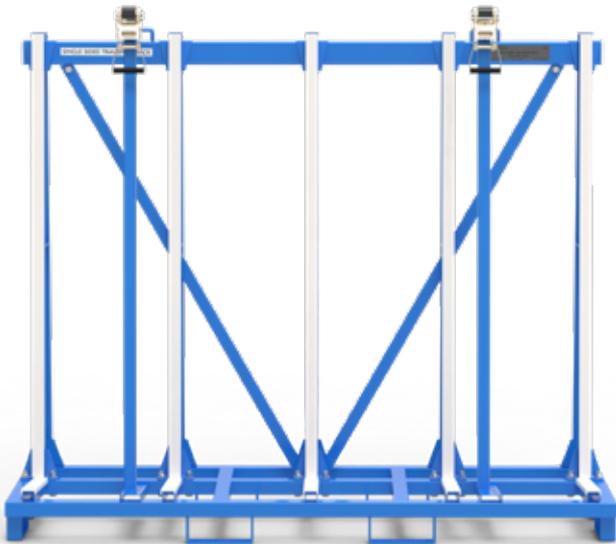

SSTR-2000

- Width of slab storage base area: 388 mm | 15.3 in
- Working load limit: 2500 kg | 5511 lb
- Net weight: 137 kg | 302 lb



SSTR-2440

- Width of slab storage base area: 388 mm | 15.3 in
- Working load limit: 2500 kg | 5511 lb
- Net weight: 161 kg | 355 lb



TF-SERIES TRANSPORT FRAMES

The Aardwolf Transport Frames are the most versatile frames on the market. They are the quickest frames to assemble and disassemble, with assembly time by one man taking approximately 5 minutes. Loaded frames can be moved around a factory or work site manually by one man. The fully loaded frame can be loaded on and off loaded from trucks by a forklift.





- Sturdy structure, designed to eliminate any risk of the slab tipping over.
- Slabs are placed on special rubber profiles and secured with 6 locking bars together with ratchet straps to retain materials.
- The frame features 2 hooking points to be picked up by an overhead crane.
- Reinforced with two oblique bars for the firm and secure construction.
- Built-in forklift receivers on two long sides for lifting by forklift.

Note:



Support legs should always be lowered when a loaded frame is being transported on a truck.





TF2000

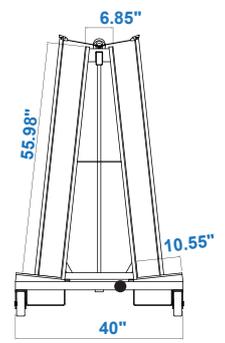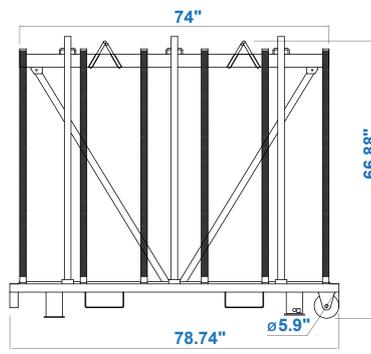



TF2440

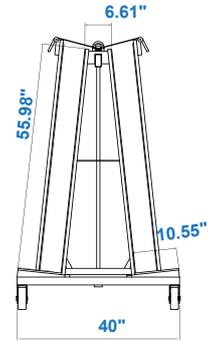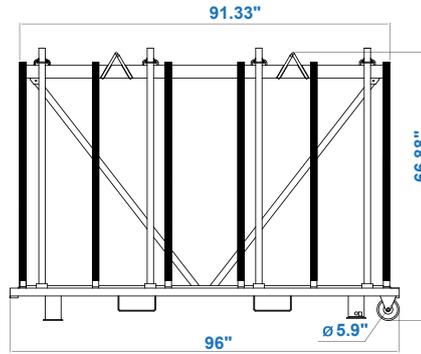

TF3050

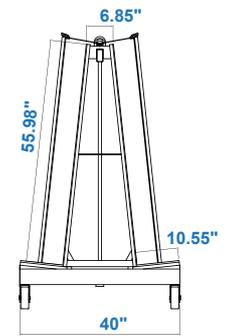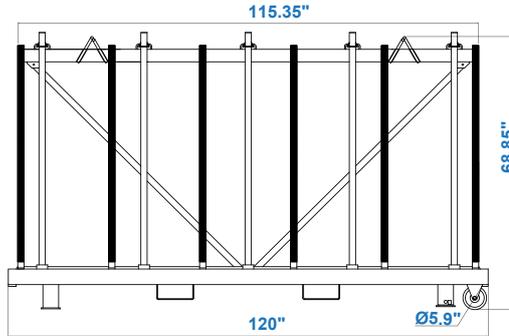

TF3050H

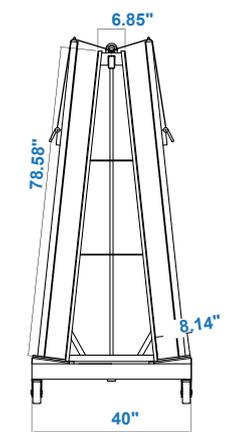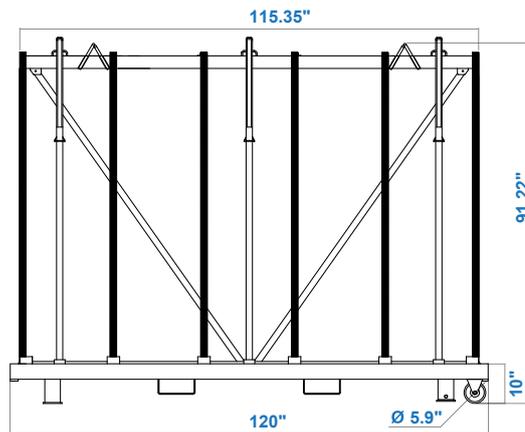

| PRODUCT CODE | TF2000 | | TF2440 | | TF3050 | | TF3050H | | |
|--|---------|---------|---------|---------|---------|---------|---------|--------|--|
| Number of wheels | 4 | | 4 | | 4 | | 4 | | |
| Straps of each side | 3 | | 4 | | 5 | | 3 | | |
| Width of slab storage base area on each side | 268 mm | 10.6 in | 268 mm | 10.6 in | 268 mm | 10.6 in | 207 mm | 8 in | |
| Length | 2000 mm | 78.7 in | 2440 mm | 96 in | 3050 mm | 120 in | 3050 mm | 120 in | |
| Working load limit per side | 1250 kg | | | | | 2756 lb | | | |
| Total working load limit | 2500 kg | | | | | 5511 lb | | | |
| Net weight | 182 kg | 401 lb | 206 kg | 454 lb | 239 kg | 527 lb | 260 kg | 573 lb | |



AF-SERIES TRANSPORT FRAMES

The QP Frames are designed for delivering heavy sheets of glass and stone to construction sites where a strong, heavy frame is needed to lift the complete load and frame together onto building sites. The fully loaded frame can easily be moved around the floors on different levels of construction sites.



1850x1279x2108mm

AF1850QP

- Width of each side: 295 mm | 11.6 in
- Working load limit: 1100 - 4000 kg | 2425 - 8818 lb
- Net weight: 246 kg | 542 lb



2440x1297x1879mm

AF2440QP

- Width of each side: 323 mm | 12.7 in
- Working load limit: 2000 - 4000 kg | 4409 - 8818 lb
- Net weight: 272 kg | 600 lb



Width of each side: 204.5 mm | 8 in
 Working load limit: 400 kg - 750 kg | 882 lb - 1653 lb

SLAB BUGGY TRANSPORT FRAMES

Ideal for transporting material within the factory and on building sites. Rubber is provided on frame surfaces for maximum protection. Heavy-duty wheels allow easy manoeuvring of fully-loaded carts in the workshop and on the construction site.

- Swivel wheels with hinge bolts.
- Durable electrostatic coating.
- Pneumatic rear wheels for easy control



Slab Buggy Single Side
SBSS



Slab Buggy Double Side
SBDS




Economy Slab Buggy
Single Side SBDS



STORAGE 'A' FRAMES

The heavy duty Aardwolf 'A' Frames are a very safe frame for storing large slabs of marble and granite. The base rails have pockets, which allow the safety posts to be moved and placed right up against slabs after some slabs are removed. High winds have been known to suck slabs off frames, especially when slabs are stored outside.

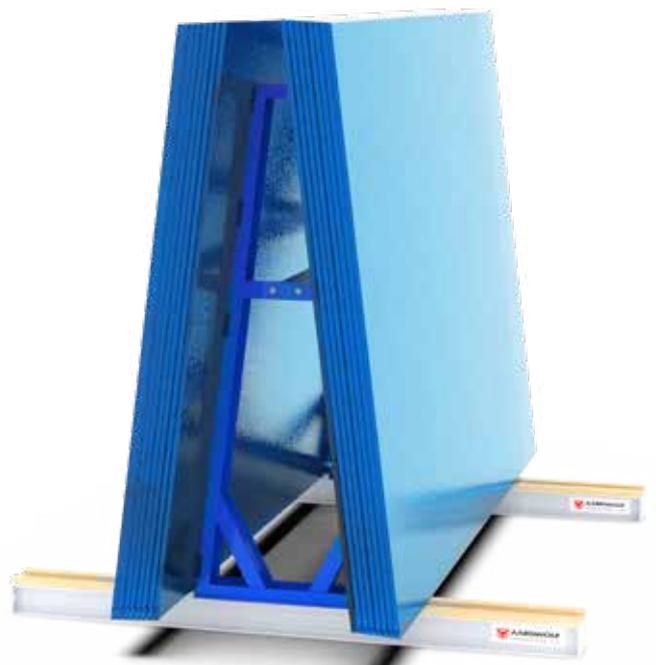



SAF01

- Heavy duty steel construction. Full slab design.
- Sold and used as a set. Store slabs on both sides.
- Durable powder coat finish for weather protection.
- Holes in the base rail drain water to reduce corrosion.
- Rubber pads on the face of the vertical frame.
- Middle support bar connects each A-Frame end piece.
- 4 safety post 100 x 50 x 1400 mm
(3.93"x1.96"x55.11") high strength posts.
- Working load limit: 6.800 kg per side (15,000 lb per side).
- Dimensions of the frame: L.1830 x W.1830 x H.1710 mm
(72.04" x 72.04" x 67.32").



**Standard
SAF02-S**

- Steel construction.
- Full slab design.
- Sold and used as a set.
- 59" (1500mm) height handles full slabs.
- Durable powder coat finish for weather protection.
- Holes in the base rail drain water to reduce corrosion.
- Dimensions of the frame: L.1510 x W.1500 x H.1500
(59.44"x59.05"x59.05").
- Working load limit: 5,500 kg per side (12,000 lb per side).

Optional extra: Timber gluts for base.



**Heavy Duty
SAF02-HD**

- Store slabs on both sides.
- Heavy duty steel construction.
- Full slab design.
- Sold and used as a set.
- Durable powder coat finish for weather protection.
- Holes in the base rail drain water to reduce corrosion.
- Dimensions of the frame: L.1613 x W.1500 x H.1500
(63.5"x59.05"x59.05").
- Working load limit: 6,800 kg per side (15,000 lb per side).

Optional extra: Timber gluts for base.



**Plus
SAF03**

- Heavy duty steel construction. Full slab design.
- Sold and used as a set. Store slabs on both sides.
- Durable powder coat finish for weather protection.
- Holes in the base rail drain water to reduce corrosion.
- Rubber pads on the face of the vertical frame.
- Middle support bar connects each A-Frame end piece.
- 4 safety post 100x50 x1400 high strength posts.
- Dimensions of the frame: L.1600 x W.1600 x H.1650 mm
(62.99"x62.99"x64.96").
- Working load limit: 6,800 kg per side (15,000 lb per side).
- The safety posts are not included.



FOLDING 'A' FRAMES

Hauling granite and marble isn't easy, and it certainly isn't safe if you don't have the right equipment. A well-made transporting frame is necessary for both the safety of the driver and other workers, as well as for the protection of the granite and marble.

The sturdy Aardwolf Folding 'A' Frame, with its unique integrated vertical locking bars and ratchet locking straps, is designed to hold all material safely and securely, which eliminates risks to the operator and prevents damage to materials. The load is secured independently on each side by two vertical locking bars, which are inserted into brackets at the base of the frame and held by ratchet locking straps at the top.

The unloaded frame can be folded up by the simple withdrawing of two spring-loaded pins from the cross braces and the lowering of the three wheels at one end by means of a cam lever. The lowered wheels also allow the frame to be positioned on the tray of a truck or manually moved around the factory.

- Bolt holes in the base of the frame for optionally securing the Folding 'A' Frame to the vehicle
- Granite is secured by rubber pads mounted on cleats, which are in turn adjustable in height along the vertical locking bars
- Large hand-tightened wing nuts are used to tighten the cleats to the vertical locking bars
- Powder-coated finish



Mod FAF-1600

▶ Width of each side: 386 mm | 15.2 in
W.L.L: 6000 kg | 13228 lb

Mod FAF-1800

▶ Width of each side: 352 mm | 13.9 in
W.L.L: 6000 kg | 13228 lb

Mod FAF-2100

▶ Width of each side: 465 mm | 18.3 in
W.L.L: 7500 kg | 16534 lb


















WOLF RACKS

The Wolf Racks have an A-frame structure that is manufactured from 2mm thick sheet metal. The frames have an open structure. The tops of the individual A-frames contain rivet nuts and are bolted into a U shape tie bar with self-aligning bolts while load bars are fitted into slots at the base of the A-frames on each side.

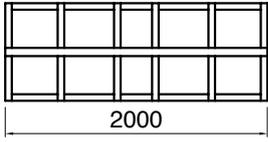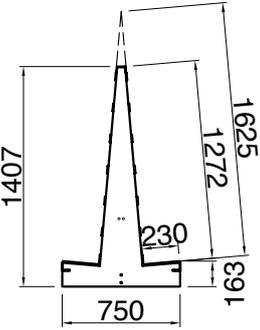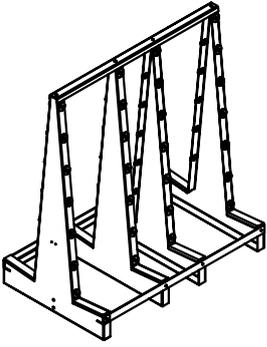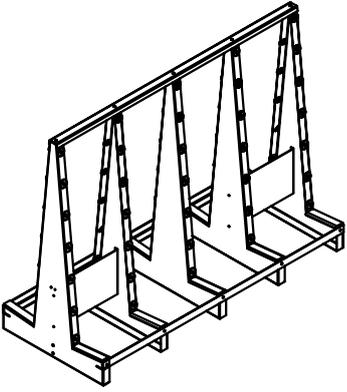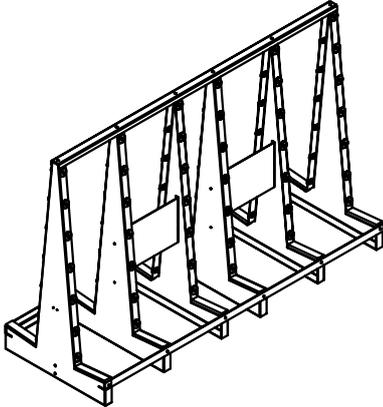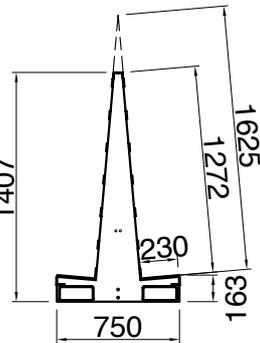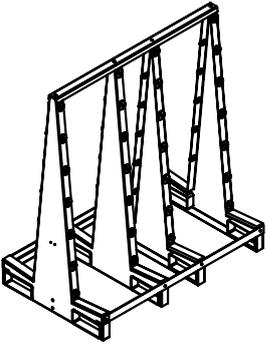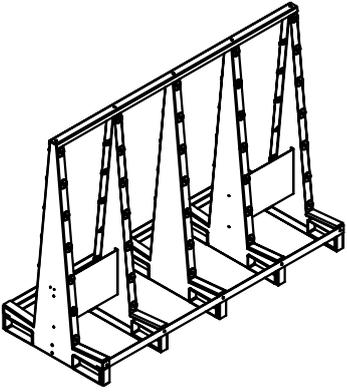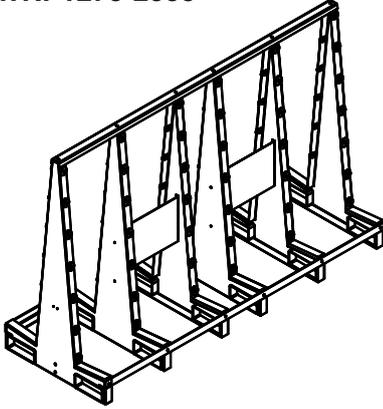

| | | | | | | |
|---|---|--|---|--|---|---|
| DIMENSION IN METRIC |  |  |  | | | |
| WR12700  | WR1270-1200  | WR1270-1600  | WR1270-2000  | | | |
| WRP1270  | WRP1270-1200  | WRP1270-1600  | WRP1270-2000  | | | |
| OPTIONAL ATTACHMENT | WOLF RACK CART | | HANDLE | SAFETY POSTS | WIVEL WHEEL | FIXED WHEEL |
| |  | |  |  |  |  |

| PRODUCT CODE | WR1270/1200 | | WR1270/1600 | | WR1270/2000 | |
|--------------------|-------------|---------|-------------|---------|-------------|---------|
| Working load limit | 1000 kg | 2204 lb | 1000 kg | 2204 lb | 1200 kg | 2645 lb |
| Width of each side | 230 mm | 9 in | 230 mm | 9 in | 230 mm | 9 in |
| Weight | 48 kg | 106 lb | 65 kg | 143 lb | 75 kg | 165 lb |

| PRODUCT CODE | WRP1270/1200 | | WRP1270/1600 | | WRP1270/2000 | |
|--------------------|--------------|---------|--------------|---------|--------------|---------|
| Working load limit | 1000 kg | 2204 lb | 1000 kg | 2204 lb | 1200 kg | 2645 lb |
| Width of each side | 230 mm | 9 in | 230 mm | 9 in | 230 mm | 9 in |
| Weight | 51 kg | 112 lb | 70 kg | 154 lb | 83 kg | 183 lb |

DEMOUNTABLE FRAMES


For storing and transporting finished work. It is ideal for transporting and storing material within the factory or transporting material to building sites. Often people like to have two 'A' frames for one base. They will have one frame on their truck and one in the factory on the base. When the truck comes back from one job, they will remove the empty frame from the truck, place a full-frame on the truck and place the empty frame on the base ready to be reloaded. It makes sense. Frames can be loaded onto the truck with a forklift or crane.

- Sturdy and safe structure for transporting materials
- Covered with a special rubber layer for protecting materials
- The frame has two hooking points to hook to an overhead crane
- Stick-out handle facilitates the transportation of materials



DFF400

- Width of each side: 300 mm | 11.8 in
- Working load limit: 1000 kg | 2204 lb
- Net weight: 162 kg | 357 lb

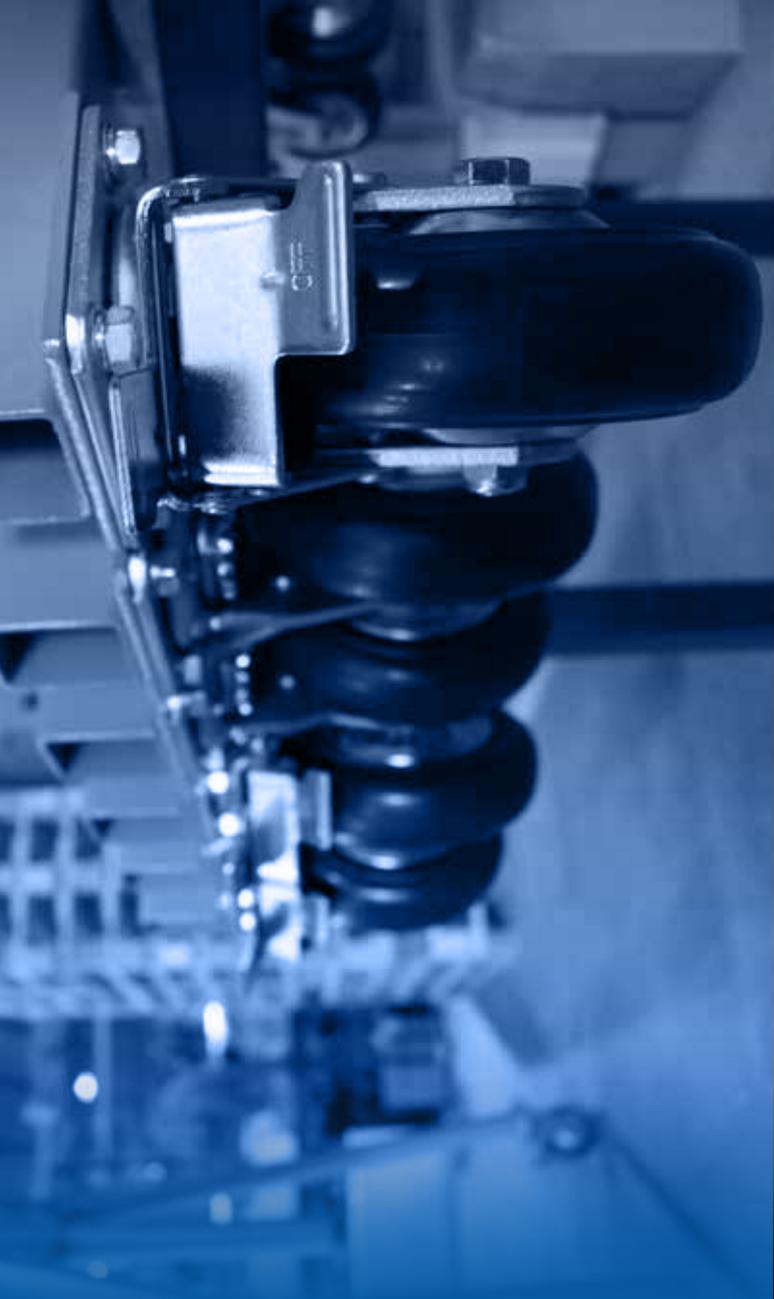

DAF2350PC

- Width of each side: 212 mm | 8.3 in
- Working load limit: 1500 kg | 3307 lb
- Net weight: 171 kg | 376 lb



DFH200

- Width of each side: 304 mm | 12 in
- Working load limit: 750 kg | 1653 lb
- Net weight: 91.5 kg | 202 lb



DFF200

- Width of each side: 300 mm | 11.8 in
- Working load limit: 1000 kg | 2204 lb
- Net weight: 102 kg | 225 lb



DFF1500PC

- Width of each side: 361 mm | 14.2 in
- Working load limit: 1000 kg | 2204 lb
- Net weight: 124 kg | 272 lb



BASE ONLY DEMOUNTABLE FRAMES

Ideal for transporting and storing material within the factory or transporting material to building sites. Heavy-duty wheels and a handle allow easy manoeuvring of your fully-loaded cart in the workshop and on the construction site.



Bdff200



Bdff400




Bdfh200

| PRODUCT CODE | Bdff200 | | Bdff400 | | Bdfh200 | |
|--------------------|---------|---------|---------|---------|---------|---------|
| Working load limit | 1000 kg | 2204 lb | 1000 kg | 2204 lb | 750 kg | 1653 lb |
| Width of each side | - | - | - | - | 320 mm | 12.6 in |
| Net weight | 49 kg | 108 lb | 68 kg | 150 lb | 43 kg | 95 lb |



TOP FRAME ONLY

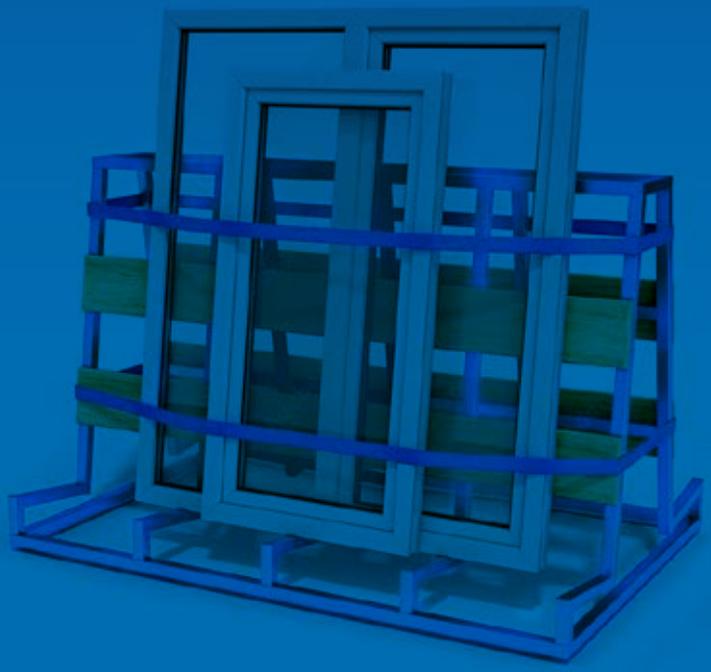

TFDFF24

- Width of each side: 300 mm | 11.8 in
- Working load limit: 1000 kg | 2204 lb
- Net weight: 63 kg | 139 lb



TFDFH2

- Width of each side: 304 mm | 12 in
- Working load limit: 750 kg | 1653 lb
- Net weight: 45 kg | 98.8 lb



TFDFF1500

- Working load limit: 1000 kg | 2204 lb
- Net weight: 75 kg | 165 lb



AARDWOLF HARP RACK



The Aardwolf Harp Rack is designed for storing glass panels. This Harp Rack will store sheets up to 1500 x 800 mm (59 x 31.5 inches).

Plastic sheathed steel rods are strung within the frame. Sheets are slipped into the grooves of the flooring and are held in place between the rods of the frame. It has 45 slots. The Harp Rack can be combined with the Packrack cart, which has four casters with two locking wheels, which allow for easy movement within the factory.

- Stores full-size plates or cutoffs
- Glass can be easily and safely retrieved
- Diagonal harp type plastic-covered rods used as dividers.
- Additional horizontal rods used to stabilize the glass

| | | |
|--------------------|---------|---------|
| Slot width | 11 mm | 0.4 in |
| Working load limit | 1000 kg | 2204 lb |



SLAB RACK STORAGE CALCULATOR APPLICATION

Ensure your slabs are safely stored by using the AARDWOLF Slab Rack Storage Calculator.

apps **website**



SLAB & BUNDLE RACKS

SLAB RACK - 3 METERS LONG
ASR01

Rail length: 3000 mm | 118 in
Post: 50 x 50 mm | 2 x 2 in

BUNDLE RACK - 3 METERS LONG
ABR10

Rail length: 3000 mm | 118 in
Post: 100 x 50 mm | 3.9 x 2 in

BUNDLE RACK - 3 METERS LONG
ABR01

Rail length: 3000 mm | 118 in
Post: 100 x 50 mm | 3.9 x 2 in

WORKSHOP RACK AWRO1P

Post: 50 x 50 mm | 2 x 2 in
Rail length: 2400 mm | 94.5 in

FINISHED GOODS RACK AFGR

Post: 50 x 50 mm | 2 x 2 in
Rail length: 2400 mm | 94.5 in

AARDWOLF REMNANT RACK
ARRO1

W.L.L: 1000 kg | 2204 lb
Rail length: 3000 mm | 118 in



TROLLEYS

Transport drywall doors, glass & stone cladding
 Grips material automatically and securely
 Clamping supports and base are rubber padded
 Compact and easy to use

SL155

SL100

SL85

SL60

Working load limit
400 kg | 882 lb

Grip range:
 0 - 155 mm
 0 - 6 in

Grip range:
 0 - 100 mm
 0 - 4 in

Grip range:
 0 - 85 mm
 0 - 3 in

Grip range:
 0 - 60 mm
 0 - 2 in




SELF-LOCKING SERIES



SLAB TROLLEY
AST01

W.L.L: 300 kg | 661 lb

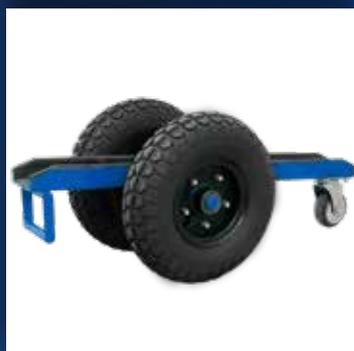

LOAD MASTER
ALM01

W.L.L: 400 kg | 882 lb



QUAD TROLLEY
AQT01

W.L.L: 300 kg | 661 lb



BROAD TROLLEY
ABT01

W.L.L: 450 kg | 992 lb

SPREADER BEAMS



Specifically designed for the stone industry. The Spreader Beams, in combination with endless slings, are an invaluable piece of equipment where the stone is required to be rolled over. The slings are suspended on crowned aluminum rollers. These make turning the load in the sling easier. The rollers will handle up to 90mm wide slings. The swivel hooks can be used in place of rollers.

Up To 1 Tonne Capacity
Help Minimise The Risk Of Injury
Tough Polyester Construction

CARGO LASHINGS & SLINGS

CLS1T



CLS2T



CLS3T



RTD1B



RTD2A



ENDLESS WEBBING SLING - 1TON - 2TON - 3TON

RATCHET TIE DOWN 1 - DOWN 2

| | CLS1T | | CLS2T | | CLS3T | | RTD1B | | RTD2A | |
|-------------------------|---------|---------|---------|---------|---------|---------|---------|--------|-----------------|--------|
| Webbing Width | 50 mm | 2 in | 60 mm | 2.4 in | 90 mm | 3.5 in | 25 mm | 1 in | 50 mm | 2 in |
| Effective/ Strap Length | 3000 mm | | | | 118 in | | 3000 mm | 118 in | 9150 mm | 360 in |
| Working Load Limit | 1000 kg | 2205 lb | 2000 kg | 4409 lb | 3000 kg | 6614 lb | 225 kg | 500 lb | 2500 - 5000 kg | |
| Net Weight | 0.42 kg | 0.9 lb | 1.14 kg | 2.5 lb | 1.92 kg | 4.2 lb | - | - | 5511 - 11023 lb | |



JIB CRANES

Operating in confined spaces & around impediments. These products can provide simple and economical solutions to these difficulties and can be combined with the vacuum lifters, Scissor Clamp Lifters, Horizontal Stone Lifting Clamps...



Machine Specific
Each assessment shows operators demonstrate competence on a specific crane model.



Impartial
Video evidence is captured during the assessment and can be referenced globally in the future.



Peer Assessment
Operators know the machines they operate the best.

| PRODUCT CODE | AGC-1000 | | CMA01 | | AJCAWM | |
|--------------------|----------|---------|---------|---------|---------|---------|
| Maximum spans | 3100 mm | 122 in | 7000 mm | 276 in | 5000 mm | 197 in |
| Working load limit | 1000 kg | 2204 lb | 500 kg | 1102 lb | 500 kg | 1102 lb |
| PRODUCT CODE | AJCOCM | | AJCOWM | | AJCPIL | |
| Maximum spans | 7000 mm | 276 in | 6000 mm | 236 in | 6000 mm | 236 in |
| Working load limit | 1000 kg | 2204 lb | 500 kg | 1102 lb | 2000 kg | 4409 lb |

POWERED COUNTERBALANCE CRANE
APCC



MANUAL COUNTERBALANCE CRANE
AMCC



POWERED COUNTERBALANCE CRANE
WITH LATERAL MOVEMENT APCCL

- An integral counterweight.
- An easy to operate hydraulically lifted extending boom.
- Folds down for easy transportation.

EXTENDED: 1700 X 2760 MM | 67 X 109 IN / W.L.L: 540 KG | 1190 LB



HAND VACUUM CUP LIFTERS

The Hand Vacuum Cup Lifters are made of strong durable aluminum together with an ergonomic handle with the capacity for any manual lift. It is rugged and dependable. It is an inexpensive way to improve efficiency.

The Hand Vacuum Cup Lifter are suitable for all smooth non-porous surfaces. It features a flat vacuum pad and a lightweight structure.



| | HVC01 | | OHVC | | HVC | |
|--------------------|--------|--------|-------------|-------------|---------|--------|
| Cup diameter | 220 mm | 8.7 in | 380 x 80 mm | 15 x 3.1 in | 220 mm | 8.7 in |
| Working load limit | 100 kg | 220 lb | 100 kg | 220 lb | 120 kg | 265 lb |
| Net weight | 1.3 kg | 2.9 lb | 1.3 kg | 2.9 lb | 1.46 kg | 3.2 lb |

DOUBLE SUCTION CUP HVC05

| HVC05 | mm - kg | inch - lb |
|--------------------|----------|-----------|
| Cup diameter | 122 | 4.8 |
| Working load limit | 50 - 100 | 110 - 220 |
| Net weight | 0.8 | 2.2 |
| Gross weight | 1.1 | 2.4 |



TRIPLE SUCTION CUP HVC06

| HVC06 | mm - kg | inch - lb |
|--------------------|----------|-----------|
| Cup diameter | 122 | 4.8 |
| Working load limit | 75 - 150 | 165 - 331 |
| Net weight | 1 | 2.2 |
| Gross weight | 1.4 | 3.1 |





**HANDY &
LIGHTWEIGHT
TOOL**



**HIGH
QUALITY
MATERIAL**



**ERGONOMIC &
SAFE
DESIGN**



**SIMPLE
TO
OPERATE**

CARRY CLAMPS FOR SHEET MATERIAL




- **PRODUCT CODE: SCC03**

Grip range: 0 - 50 mm | 0 - 2 in
Working load limit: 200 kg | 441 lb
Net weight: 6.6 kg | 14.6 lb

- **PRODUCT CODE: SCC05**

Grip range: 50 - 100 mm | 2 - 4 in
Working load limit: 200 kg | 441 lb
Net weight: 8.3 kg | 18 lb

■ STONE PANEL CARRIERS SCC02

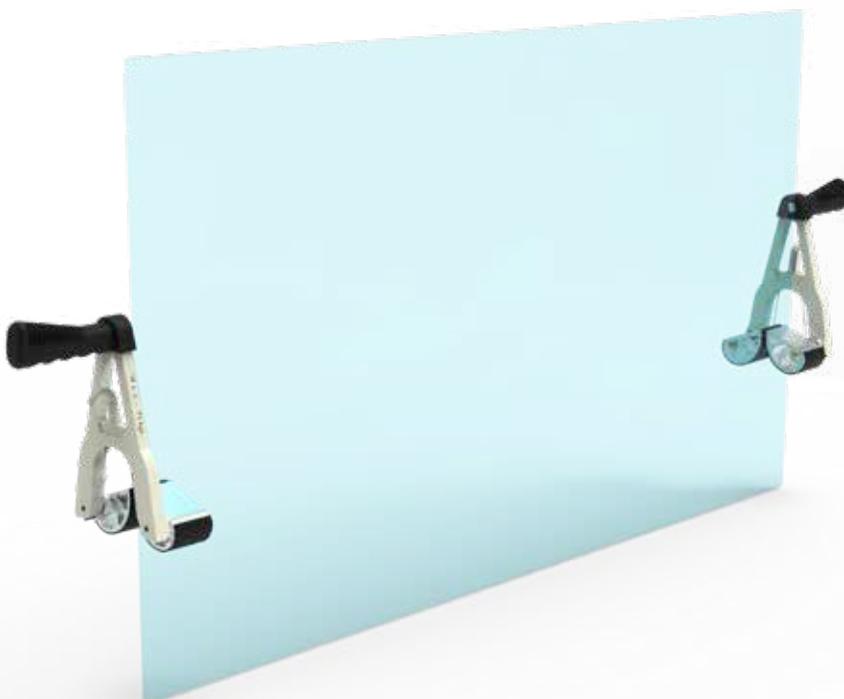

- Grip range: 0 - 52 mm | 0 - 2 in
- Working load limit: 150 kg | 331 lb
- Net weight: 2 kg | 4 lb

- Finger trigger jaw opening and load release mechanism.
- Constructed of sturdy lightweight aluminum.
- Jaws are continuously self-adjusting.
- High-friction vulcanized rubber gripping pads mounted on both plates protect the surfaces of the materials from being damaged or marred.
- Moulded rubber hand grips.
- Locks onto panels automatically.
- The vice-like grip on panels.

FORK HOOK ATTACHMENT

Attaches easily with hand screws and a 36" L safety chain with a safety latch which attaches to the forklift. The swivel hook includes a safety latch. Durable powder-coat finish

- **PRODUCT CODE: FHASF 1**

Working load limit: 1500 kg | 3307 in

Net weight: 7.5 kg | 16.5 lb

Gross weight: 7.8 kg | 17.2 lb

- **PRODUCT CODE: FHASF 2**

Working load limit: 3000 kg | 6614 in

Net weight: 13 kg | 29 lb

Gross weight: 14 kg | 31 lb



BOW SHACKLE & SWIVEL



**FORGED ALUMINIUM
SWIVEL 1.5 TONS
SS15T**

Working load limit: 1500 kg | 3307 in
Net weight: 0.47 kg | 1 lb



**COMBO SWIVEL
CHAIN
LIFTING LUG
1.5 TONS
SSC15T**

Working load limit: 1500 kg | 3307 in
Net weight: 1.47 kg | 3.2 lb



**BOW
SHACKLE
3.0T
BS30T
W.L.L: 3250 kg
7165 lb**



**SWIVEL
HOOK
3.0T
(ALLOY STEEL)
SH30T
W.L.L: 3000 kg
6614 lb**

AARDWOLF DROP BOTTOM BIN ADBB-2000

1.27 m³



- Manufactured from 3mm plate and reinforced to handle all types of solid waste products.
- Can be use by forklift or overhead crane.
- Complete emptying is carried out by pulling the draw handle.
- Hot dipped galvanised finish.
- Fork pockets.
- Crane lugs.

| | | |
|--------------------|---------|---------|
| Working load limit | 1500 kg | 3307 lb |
| Net weight | 366 kg | 807 lb |

WASTE BINS

■ WB620PC (POWDER COATED) 3MM



- Working load limit: 1000 kg | 2204 lb
- Net weight: 170 kg | 375 lb

■ WB1000PC (POWDER COATED) 3MM



- Working load limit: 1500 kg | 3307 Lb
- Net weight: 221 kg | 487 lb

■ WB1000G (GALVANISED) 3MM



- Working load limit: 1500 kg | 3307 Lb
- Net weight: 221 kg | 487 lb



AUSTRALIA



AARDWOLF AUSTRALIA

- 📍 1/5 Stanton Road, Seven Hills NSW 2147
- ☎ 02 9838 8427
- ✉ enquiries@aardwolfaustralia.com
- 🏠 www.aardwolfaustralia.com

BULGARIA



TOOL RANGE BULGARIA

- 📍 Str.Usta Kolio Ficheto 33
- ☎ +359 887 933 754

INDIA



AARDWOLF INDIA

- 📍 Harmara Road, Industrial Area, Madanganj, Kishangarh, District- Ajmer, Rajasthan India 305801
- ☎ +91 73000 68444
- ✉ sales@aardwolf.co.in
- 🏠 www.aardwolf.co.in

GERMANY



DE TOOL RANGE GMBH

- 📍 Schulze-Delitzsch-Weg 2, 33175 Bad Lippspringe
- ☎ 05252 8382830
- ✉ sales@toolrange.com.de
- 🏠 toolrange.com.de

USA



AARDWOLF USA

- 📍 19201 South Reyes Avenue, Suite A3
Rancho Dominguez California, 90221
- ☎ (562) 553-6050
- ✉ sales@aardwolfusa.com
- 🏠 www.aardwolfusa.com

VIETNAM



AARDWOLF VIETNAM

- 📍 1B, An Phu, Thuan An City
Binh Duong Province, Vietnam
- ☎ +84 931 707 793
- ✉ info@aardwolf.com.au
- 🏠 www.aardwolf.com.au